

# Model DT 200 L 400 L



### Prednosti pršilnikov DT:

- ▶ zelo mala širina usmernika
- ▶ zelo tiho delovanje
- ▶ zelo nizka potrebna pogonska moč
- ▶ zaradi posebne izvedbe usmernika, se zrak vrtinči takoj po izstopu iz usmernika
- ▶ opremljeni so z rezervoarji za čisto vodo za pranje rok in pranje sistema
- ▶ upravljanje iz kabine traktorja z enoročnim regulatorjem
- ▶ velika vlivna odprtina z mešalcem prašnatih sredstev
- ▶ dvojni nosilci šob z membranskimi protikapnimi ventili se lahko prestavljajo po višini
- ▶ sesalna in tlačna filtracija
- ▶ prirejeni so za delo z elektrostatiko

### Dodatna oprema:

- ▶ ejektorski polnilec
- ▶ električni ventili
- ▶ elektrostatika
- ▶ premične lopute za zrak
- ▶ prisekan usmernik



### Prednosti atomizera DT :

- ▶ izuzetno mala širina usmjerivača
- ▶ vrlo tihi rad
- ▶ potrebna mala pogonska snaga traktora
- ▶ specijalna izvedba usmjerivača, omogućava vrtloženje zraka na izlasku iz usmjerivača
- ▶ opremljeni su rezervoarima s čistom vodom, za pranje ruku i sistema
- ▶ upravljanje iz kabine traktora pomoću jednoručnog regulatora
- ▶ veliki uljevni otvor s mješačem praškastih sredstava
- ▶ dvostruki nosači dizni s membranskim protukapnim ventilima, podesivi po visini
- ▶ mogućnost ugradnje elektrostatike

### Dodatna oprema:

Ejektorski punjač , električni ventili, elektrostatika, pomične klapne za regulaciju zraka, povišeni usmjerivač...



### PRIPOROČILO ZA UPORABO PRŠILNIKOV ZM 200 DT in ZM 400 DT

- ▶ medvrstna razdalja
  - ZM 200 DT 1,8 - 3,5 m
  - ZM 400 DT 1,8 - 4,0 m
- ▶ višina škropljenja
  - ZM 200 DT do 2,5 m
  - ZM 400 DT do 3,5 m
- ▶ površina škropljenja
  - ZM 200 DT do 15 ha
  - ZM 400 DT do 20 ha
- ▶ vrste nasadov
  - za moderne nasade v vertikalah




### PREPORUKA ZA UPORABU ATOMIZERA ZM 200 DT i ZM 400 DT

- ▶ međuredni razmak
  - ZM 200 DT 1,8 - 3,5 m
  - ZM 400 DT 1,8 - 4,0 m
- ▶ visina prskanja
  - ZM 200 DT do 2,5 m
  - ZM 400 DT do 3,5 m
- ▶ površina prskanja
  - ZM 200 DT do 15 ha
  - ZM 400 DT do 20 ha
- ▶ vrste nasada
  - za moderne nasade u vertikalama



### USE RECOMMENDATIONS FOR ZM 200 DT AND ZM 400 DT

- ▶ Row width
  - ZM 200 DT 1,8 - 3,5 m
  - ZM 400 DT 1,8 - 4,0 m
- ▶ Spraying height
  - ZM 200 DT up to 2,5 m
  - ZM 400 DT up to 3,5 m
- ▶ Recommended spraying area
  - ZM 200 DT up to 15 ha
  - ZM 400 DT up to 20 ha
- ▶ Type of plantations
  - Only for verticals

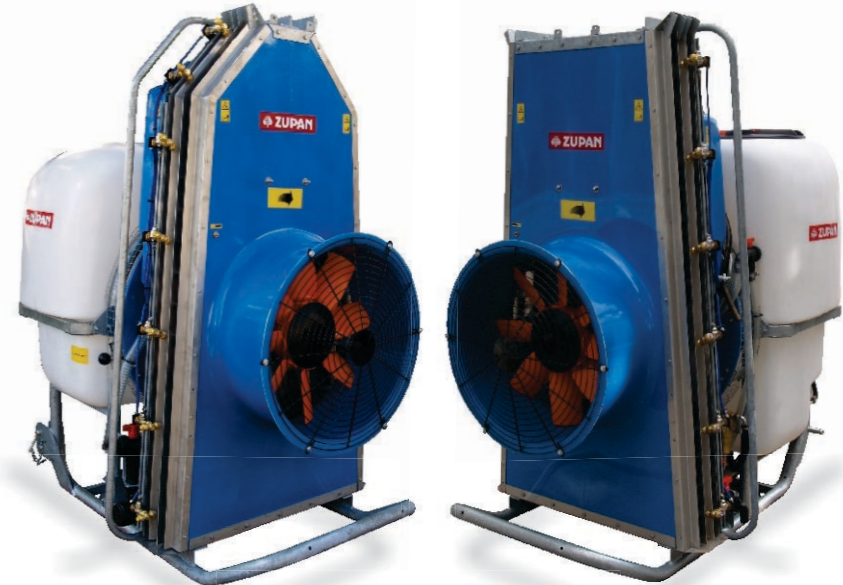

### Sprayers DT have following advantages:

- ▶ Only one meter wide air rectifier
- ▶ Very low noise level
- ▶ Low required power consumption
- ▶ Whirling air stream, because of special air rectifier
- ▶ Two clean water tanks for thinning the rest of the sprinkling-broth, washing the system and for hand washing
- ▶ Single-handed remote control for guidance from the tractor's cabin
- ▶ Large infuse opening with the hydraulic dust mixer at the basket filter
- ▶ Double, turn able sprayer nozzles, adjustable in level, with non-drop-valve

### Additional equipment:

Electric ball valves, water ejector, electrostatic, air rectifier for higher trees, especially air deflectors...

	L	L/min	bar	∅	m <sup>3</sup> /h	m/s	kW	N°	A	B	C	kg
ZM 200 DT	200	55	40	500/600	35.000	30	12	10	1150	1520	1200	230
ZM 400 DT	400	55	40	500/600	35.000	30	12	12	1150	1870	1650	280