


SNv



DIMENSIONS: SN v

Wheels

Front/Rear	X	Y
7.50-16	270	1035
7.50-18	300	1025
250/80-18	290	1075
280/70-18	280	1175
300/80-15.3	310	1180

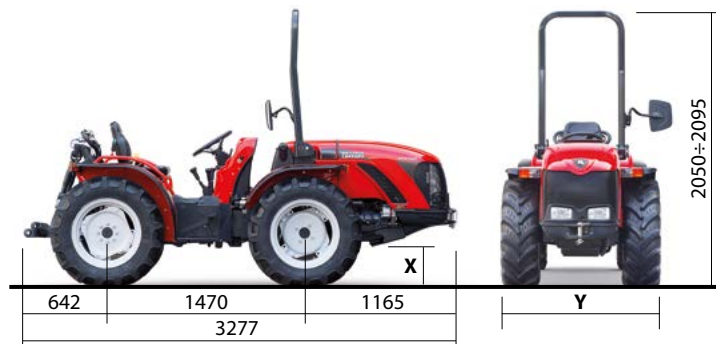

Model

SN 5800 V

SN 6400 V

Chassis	ACTIO™ Full chassis with oscillation • Articulated	
	• 4 equal wheel drive • Front and rear final drive	
Engine Type	Direct injection	Direct injection
	• Counter rotating	
Emissions Regulations	Stage 3A	Stage 3A
N° Cylinders	4	3 Turbo
Displacement (CC)	2188	2082
Power kW/HP (97/68/CE)	36,5/49,7	41,2/56
Maximum engine revs	3000	2600
Torque max (Nm/revs)	139/1800	195/1400
Cooling	Water	Water
Tank Capacity (litres)	42	42
Transmission	Synchr. 24 speed gear box: 12 forward and 12 reverse with inverter	
PTO	Independent, with mechanic control, standard speed 540 rpm and synchronized	
Rear hydraulic lift	3-points hitch Cat. 1 - Capacity (Kg): 1700	
Operating Pressure (bar)	130	130
Steering	Hydraulic with 2 pistons with "Load Sensing" system	
Brakes	Hydraulic rear oil bath disc brakes - Independent emergency and parking brake: band type on transmission	
Weight (Kg)	1600	1630

Standard Features

- Front differential lock with mechanic control, rear with hydraulic control
- Adjustable suspension seat
- Safety belts
- Rear adjustable height tow hitch
- Front tow hitch
- Foldable protection roll bar
- Adjustable wheel rims
- Horn
- Lights, braking and turning indicators
- Unipolar socket and 7 way trailer socket
- Series of control lights
- Tachometer/revolution counter
- Safety starting switch
- Battery isolation switch

Optional Features

- Hydraulic power lift with draft and position control
- PTO at 540 and 1000 rpm
- Rear revolving working light
- 4 types of ancillary hydraulic systems with single-acting and double-acting manifolds (up to 5 rear quick couplers)
- Steering column adjustable in tilt
- Digital speedometer
- Pneumatic suspension seat
- Wheel ballasts
- Lifting arms with quick release couplings
- Spacers for rear and front mudguards

