



It dominates the hillside, soars over the plain

T *SERIES*
MAJOR

T SERIES
MAJOR



TOTALLY AC TRACTORS

Dynamism, agility, efficiency are the results of these new generation, compact tractors designed for specialised agricultural operators on plains, hillsides and mountainsides along with the crops on the Mediterranean basin where grip, handling and dimensions are deciding factors. The "T" Major Series is made up of various steering or articulated models; with equal-sized wheels or with larger rear wheels. Its perfect weight distribution, guaranteed by the ACTIO™, over all four wheels, ensures grip, stability and top level safety.



TN

Chassis

Engine Type

- Emissions Regulations
- N° Cylinders
- Displacement (CC)
- Power kW/HP (97/68/CE)
- Maximum engine revs
- Torque max (Nm/revs)
- Cooling
- Tank Capacity (litres)

Transmission

PTO


Rear hydraulic lift

Operating Pressure (bar)

Steering

Brakes

Weight (Kg)



12+12
SYNCHRONIZED
WITH INVERTER

KM/H
30

KG **2200**
↑

Wheels

Front/Rear	X	Y
7.50-16	270	1235
8.25-16	270	1265
7.50-18	300	1280
250/80-18	290	1305
280/70-18	280	1380
300/80-15.3	285	1395
29x12.50-15	225	1440
31x15.50-15	240	1615

TN 5800 TN 6400 TC 5800 F TC 6400 F

ACTIO™-Full chassis with oscillation • Steering wheels • Front and rear final drive

4 equal wheel drive		4 unequal wheel drive	
Direct injection	Direct injection	Direct injection	Direct injection
• Counter rotating		• Counter rotating	
Stage 3A	Stage 3A	Stage 3A	Stage 3A
4	3 Turbo	4	3 Turbo
2188	2082	2188	2082
36,5/49,7	41,2/56	36,5/49,7	41,2/56
3000	2600	3000	2600
139/1800	195/1400	139/1800	195/1400
Water	Water	Water	Water
42	42	42	42
Synchronized 24 speed gear box: 12 forward and 12 reverse with inverter			
Independent, with mechanic control, standard speed 540 rpm and synchronized			
3-points hitch Cat. 1 - Capacity (Kg): 2200			
130	130	130	130
Hydraulic with 2 double acting pistons with "Load Sensing" system			
Mechanic rear oil bath disc brakes - Steering brakes			
Rear axle and parking handbrake with control lever operating the main device			
1630	1650	1760	1780


Standard Features

- Front and rear differential locks, foot lock, with mechanic control
- Adjustable suspension seat
- Safety belts
- Rear adjustable height tow hitch
- Front tow hitch
- Foldable protection roll bar
- Adjustable wheel rims
- Horn
- Lights, braking and turning indicators
- Unipolar socket and 7 way trailer socket
- Series of control lights
- Tachometer/revolution counter
- Safety starting switch
- Battery isolation switch

Optional Features

- Hydraulic power lift with draft and position control
- PTO at 540 and 1000 rpm
- Rear revolving working light
- 4 types of ancillary hydraulic systems with single-acting and double-acting manifolds (up to 5 rear quick couplers)
- Steering column adjustable in tilt
- Digital speedometer
- Pneumatic suspension seat
- Wheel ballasts
- Cast iron wheel flanges for 20" rear wheels (only for TC F)

TCF

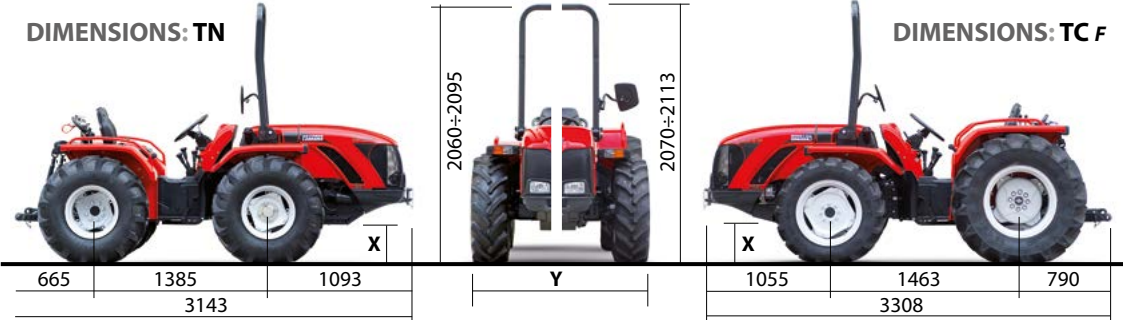

Wheels

Front	Rear	X	Y
8.25-16	280/85 R20	263	1325
300/80-15.3	360/70 R20	304	1465
280/70-18	360/70 R20	272	1435

